


Date:

Type:

Firm Name:

Project:

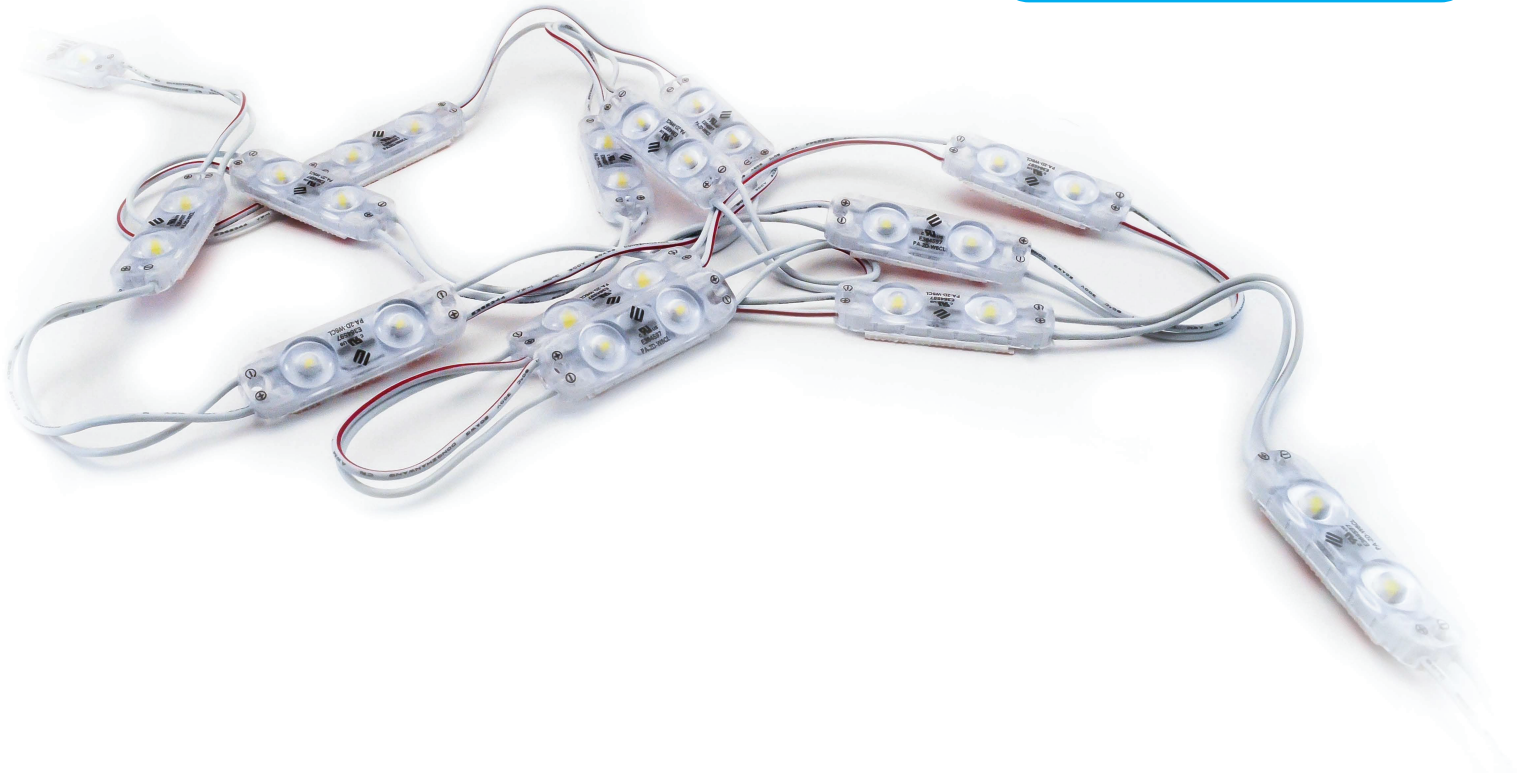

Panoramic 2D Series

Everylite Datasheet Ver 3.0
Revision Date 02/2022



Features

- Panoramic Series 2-diode LED module for all your standard signage applications
- You can combine it with our new generation Panoramic Series 1D and 3D modules to reach any possible corner or angle while maintaining perfect color consistency
- Preinstalled double sided tape for a quick layout and screw holes in all modules for easy permanent installation
- Incredible 170 degree beam angle means better coverage and no hot spots
- 2835 surface mount LED with a high luminous efficacy
- Perfect color consistency with in-house color binning
- 50,000 hours rated lifetime
- UL, CE and RoHS

Panoramic 2D Parameters

Item #	Color	Peak Wave Length	module/ft	Lm/module	Lm/ft	Lm/W	W/module	W/ft	Input Voltage	Viewing Angle	Waterproof
PA-2D-W6CL	Pure White	6500K	1.7	68	116	94	0.72	1.22	12	170°	IP66

Power Supply Maximum Loading Capacity*

0.72 Watt LED

Power Supply	20W	60W	100W	150W	240W
By Module	25 mods	75 mods	125 mods	187 mods	300 mods
By Footage	14.8 ft	44.2 ft	73.6 ft	110 ft	176.5 ft

*Due to voltage drop, a maximum of 50 modules can be run before power needs to be reintroduced into the line of modules.

Drawing

